

Finally,  
the answer to  
**LCD protection.**


We like to call  
it, armor.

## ARMR200

### Vikuiti™ Anti-Reflection Matte Removable Film

*LCD displays are extremely fragile. Screen damage costs both time and money, from warranty costs to repair time. Vikuiti™ Anti-Reflection Matte Removable Film ARMR200 helps protect LCD screens from damage and features advanced anti-reflection properties that improve viewing on LCD screens.*

- **Durable** – helps protect display from scratches and scuffs
- **Anti-reflective coating** – helps improve clarity and readability
- **Easy to clean** – markers and fingerprints wipe away easily
- **Removable** – non-tacky adhesive removes easily with no residue
- **Matte surface** – for less slippage when writing with a stylus
- **Ultra thin** – ideal for screens requiring a stylus

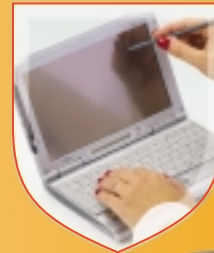

# ARMR200

Durable Protection. Removable Technology.



# VIKUITI™ ANTI-REFLECTION MATTE REMOVABLE FILM [ARMR200]

**Protects delicate LCD screens from damage,  
while improving clarity and readability.**

- **Optically clear, durable film** – helps provide non-permanent protection of LCDs
- **Ultra-thin multi-layer anti-reflection optical coatings** on the front surface minimize glare and increase clarity
- **Anti-soiling top layer** – easy to clean
- **Repels ink and even permanent markers** – wipes off easily with a lint-free cloth
- **Full surface adhesive** – no gaps or bunching
- **Durable hardcoat** – designed to last for up to 3 months, depending on use




**Durable**  
may help reduce  
repair/warranty costs



**Vikuiti™ ARMR200**  
film is available in a  
variety of sizes



**Easy to apply –**  
non-tacky adhesive  
applies smoothly

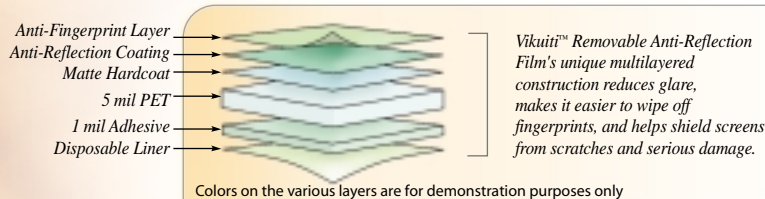

## N o m i n a l   f i l m   p r o p e r t i e s

<b>Thickness</b>	Base ————— 5 mil
	Adhesive ——— 1 mil
<b>Pencil Hardness</b>	≥ 3H
<b>Durability</b>	10 rubs at 160g/in <sup>2</sup>
<b>Chemical Resistance</b>	IPA, window cleaner, permanent marker, coffee
<b>Environmental</b>	Heat/Humidity — 65°C / 95% RH, 500 hrs
	Dry Heat ——— 85°C, 500 hrs
<b>Specular Reflectance</b>	≤ 1.1%
<b>Transmission</b>	≥ 92%
<b>Gloss</b>	75-110 gloss units
Typical values, not for specification purposes.	

**3M**

**Optical Systems Division**

3M Center, Building 275-6E-07  
St. Paul, MN 55144-1000

**We're easy to reach!**

For more information, please visit our website at

[www.3M.com/vikuiti/armr](http://www.3M.com/vikuiti/armr)

or call Customer Service at

**1-800-553-9215**

Vikuiti and the Vikuiti "Eye" symbol are trademarks of 3M.

Printed in U.S.A.

© 3M 2005 75-0500-5214-3